


Section 1 Threaded Fasteners

SOCKET PIPE PLUGS WITH SEAL RING # 2353-VSTI


Steel, Zinc Yellow with Buna seal ring seated under head
(Available with Viton seal ring on request)

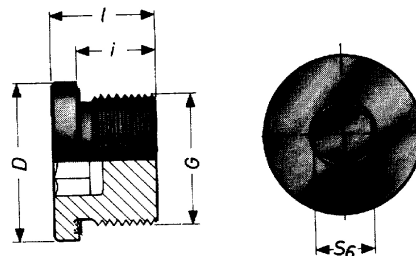

NOMINAL SIZE G	NOMINAL PRESSURE BAR	DIMENSIONS mm			
		HEX KEY SIZE S ₆	HEAD DIAMETER D	OVERALL HEIGHT I	THREAD LENGTH i
M 10 X 1	NP 400 (5680 PSI)	5	14	12	8
M 12 X 1.5		6	17	17	12
M 14 x 1.5		6	19	17	12
M 16 x 1.5		8	22	17	12
M 18 x 1.5		8	24	17	12
M 20 x 1.5		10	27	19	14
M 22 x 1.5		10	27	19	14
M 26 x 1.5		12	32	21	16
M 27 x 2		12	32	21	16
M 33 x 2		17	40	22.5	16
M 42 x 2	NP 250	22	50	22.5	16
M 48 X 2	(3550 PSI)	24	55	22.5	16
1/8 BSP	NP 400 (5680 PSI)	5	14	12	8
1/4 BSP		6	19	17	12
3/8 BSP		8	22	17	12
1/2 BSP		10	27	19	14
3/4 BSP		12	32	21	16
1 BSP		17	40	22.5	16
1 1/4 BSP	NP 250	22	50	22.5	16
1 1/2 BSP	(3550 PSI)	24	55	22.5	16

FITTING CAPS # 7605

Ref: DIN 7605 - Steel - Internal Thread



THREAD DIA.	CAP O.D.	HEIGHT	ACROSS FLATS
M 8 x 1	11	12	12
M 10 x 1	13	12	14
M 12 x 1.5	15	15	17
M 14 x 1.5	17	15	19
M 16 x 1.5	19	15	22
M 18 x 1.5	21	15	24
M 22 x 1.5	26	18	27
M 26 x 1.5	30	18	32
M 30 x 1.5	34	18	36

How to Order

Item #: 2353-VSTI

Size: M 27 x 2

Quantity: 50

Tel: 1-888-966-MMCC