


Section 1 Threaded Fasteners



HEXAGON HEAD THREAD FORMING SCREWS # 7500 D

Trilobular, Taptite™ thread - Steel, Case Hardened - Zinc Plated
Designed for use in "blind thread" applications where use of a lock nut is not possible

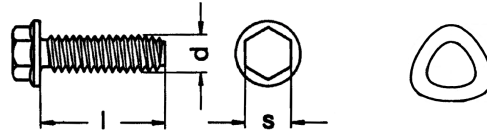

NOM. LENGTH	NOMINAL THREAD DIAMETER in mm			
	M 4	M 5	M 6	M 8
6	X	-	-	-
8	X	X	X	-
10	X	X	X	-
12	X	X	X	-
16	X	X	X	X
20	X	X	X	X
25	-	X	X	X
30	-	X	X	X
40	-	-	-	X

THREAD DIA.	M 4	M 5	M 6	M 8
Flange Diameter max.	8.9	10.4	13	17
Head Height (including washer) max.	4.23	5.25	6.25	8.35
Across Flats Wrench Size	7	8	10	13

"x" denotes stock availability

Please note: DIN 7500 D calls out a head configuration according to DIN 933. Most manufacturers in Europe, however, produce this item with and optional hex washer head flange. Most of our inventory DOES have a flange with a maximum O.D. listed above (Flange Diameter max). For Phillips Pan Head version of this screw (# 7500 C), please see page # 1-103 and for the Socket Head version (# 7500 E), please see page 1-53.

HEXAGON HEAD LAG SCREWS # 571

Ref: DIN 571 - Steel - Zinc Plated with non-ISO metric thread

Designed for threading into wood - Thread Length = Approx. 60% of Nominal Length



NOM. LENGTH	THREAD DIAMETER in mm					
	5	6	8	10	12	16
20	X	X	-	-	-	-
25	X	X	X	-	-	-
30	X	X	X	X	-	-
35	X	X	X	X	-	-
40	X	X	X	X	X	-
45	X	X	X	X	X	-
50	X	X	X	X	X	-
55	X	X	X	X	X	-
60	X	X	X	X	X	X
70	-	X	X	X	X	X

NOM. LENGTH	THREAD DIAMETER in mm					
	5	6	8	10	12	16
80	-	X	X	X	X	X
90	-	X	X	X	X	X
100	-	X	X	X	X	X
120	-	X	X	X	X	X
140	-	-	X	X	X	X
160	-	-	X	X	X	X
180	-	-	-	X	X	X
200	-	-	-	X	X	X
220	-	-	-	-	X	X
240	-	-	-	-	X	X

"x" denotes stock availability

THREAD SIZE	5	6	8	10	12	16
HEAD HEIGHT	3.5	4	5.5	7	8	10
WRENCH SIZE	8	10	12	17	19	24
THREAD LENGTH	Approx 60% (0.60) of Nominal Length					

How to Order
Item #: 571
Size: 6 x 50
Quantity: 400
Tel: 1-888-966-MMCC