

THREAD MEASURING WIRES # 1594

In Sets of 3 Wires - High Speed Steel RC 62 - 64 - Wire sizes are nominal - Calibrated for 60° metric thread - Calibrated size will show on label with matching constant - In all cases calibrated wire diameter will be within 0.0001 m of the exact size of the wires and within 0.0005 m of the nominal best wire diameter.





NOM. SIZE PITCH mm	NOM. BEST WIRE DIA. IN mm~	NOM. CONSTANT mm	NOM. SIZE PITCH mm	NOM. BEST WIRE DIA. IN mm~	NOM. CONSTANT mm
0.2	0.1155	0.1732	1.5	0.8660	1.2990
0.225	0.1299	0.1949	1.75	1.0104	1.5155
0.25	0.1443	0.2165	2.0	1.5147	1.7321
0.3	0.1732	0.2598	2.5	1.4434	2.1651
0.35	0.2021	0.3031	3.0	1.7321	2.5981
0.4	0.2309	0.3464	3.5	2.0207	3.0311
0.45	0.2598	0.3897	4.0	2.3094	3.4641
0.5	0.2887	0.4330	4.5	2.5981	3.8971
0.6	0.3464	0.5196	5.0	2.8868	4.3301
0.7	0.4041	0.6062	5.5	3.1754	4.7631
0.75	0.4330	0.6495	6.0	3.4641	5.1962
0.8	0.4619	0.6928	7.0	4.0415	6.0622
0.9	0.5196	0.7794	8.0	4.6188	6.9282
1.0	0.5774	0.8660	9.0	5.1962	7.7942
1.25	0.7217	1.0825	10.0	5.7735	8.6603

~Please note: Wires that touch at the pitch diameter are called "Best Size" wires

METRIC GAGE BLOCK SET # GBS

U.S. Federal Accuracy Grade 2 - Hardened Steel - Rectangular Blocks

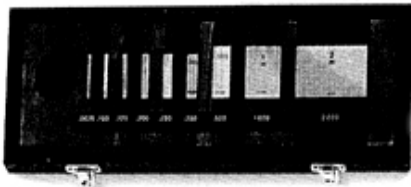

ITEM	SIZE	MEASURING RANGE mm	INCLUDES (1 EACH) IN mm
GBS	SET - 9 (9 Pc. Set)	1.0 - 61.0 in 1.0 mm Steps 2.0 - 61.0 in .5 mm Steps 4.0 - 61.0 in .25 mm Steps	1.0, 2.0, 2.25, 2.5, 3.0, 5.0, 10.0, 15.0, 25.0
GBS	SET - 88 (88 Pc. Set)	3.0 - 450 in .0005 mm Steps 2.0 - 450 in .001 mm Steps 1.0 - 450 in .01 mm Steps 1.0 - 450 in .1 mm Steps	1 Block .5 mm 1 Block 1.0005 mm 9 Blocks 1.001 mm through 1.009 mm (Steps of .001 mm) 49 Blocks 1.01 mm through 1.49 mm (Steps of .01 mm) 18 Blocks 1 mm through 9.5 mm (Steps of .5mm) 10 Blocks 10 mm through 100 mm (Steps of 10 mm)

How to Order

Item #: 1594
Size: 0.45
Quantity: 5
Tel: 1-888-966-MMCC