

FLEXIBLE NYLON TUBING # L 3000

Genuine Legris® high grade nylon tubing is manufactured for the transmission of compressed air, gases, fuel, hydraulic fluids, lubricants and for vacuum purposes. It has resistance to alkalis, greases, petroleum products, oils and salt solutions.

Tube colors: N - Natural, B - Black, R - Red, G- Green and Y - Yellow.



METRIC SIZES - SOLD IN FULL ROLLS ONLY


TUBE DIA. O.D. x I.D.	ONE ROLL METERS	O.D. TOLERANCE PLUS/MINUS mm	TEMPERATURE ° F			BENDING RADIUS INCH min.	STOCK COLORS AVAILABLE*
			0° - 90°	90° - 120°	120° - 160°		
			Working Pressure PSI				
4 x 2.7	25	+0.05/-0.08	250	215	170	3/4	N, B, R, G, Y
5 x 3.3	25	+0.05/-0.08	250	215	160	1	N
6 x 4	25	+0.05/-0.1	250	215	160	1 1/4	N, B, R, G, Y
8 x 6	25	+0.05/-0.1	200	160	115	2 1/4	N, B, R, G, Y
10 x 8	25	+0.05/-0.1	160	125	95	3 1/2	N, B, R, G
12 x 10	25	+0.05/-0.1	130	100	70	3 1/2	N
14 x 11	25	+0.05/-0.1	200	130	100	5	N
14 x 12	25	+0.05/-0.1	150	125	90	4	N

INCH SIZES - SOLD IN FULL ROLLS ONLY

TUBE DIA. O.D. x I.D.	ONE ROLL FEET	O.D. TOLERANCE PLUS/MINUS mm	TEMPERATURE ° F			BENDING RADIUS INCH min.	STOCK COLORS AVAILABLE*
			0° - 90°	90° - 120°	120° - 160°		
			Working Pressure PSI				
1/8 x .090	100	+0.002/-0.003	250	215	170	1/2	N, B, R, G, Y
5/32 x .106	100	+0.002/-0.003	250	215	170	3/4	N, B, R, G, Y
3/16 x .117	100	+0.002/-0.003	250	215	170	3/4	N, B
1/4 x .170	100	+0.002/-0.004	250	215	160	7/8	N, B, R, G, Y
5/16 x .232	100	+0.002/-0.004	200	160	115	1 3/4	N, B
3/8 x .250	100	+0.002/-0.004	250	215	170	2 1/2	N, B, R
1/2 x .375	100	+0.002/-0.004	200	160	115	3	N, B, R

SUPPORT FERRULE FOR NYLON TUBING # L 0127

NOMINAL SIZE	O.D.1	I.D.
5 x 3.3	5	3.3
6 x 4	6	4
8 x 6	8	6
10 x 8	10	8
12 x 10	12	10
14 x 12	14	12

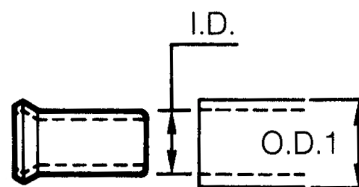

How to Order

Item #: L3000
Size: 6 x 4
Quantity: 10 (Rolls)
Tel: 1-888-966-MMCC

*Please note: When ordering # L 3000, you must identify your color preference. If color is not specified, natural will be supplied as the default.